


Air Brake Tubing

SAE J844 Nylon, 1120 Series



Parflex 1120 Series Tubing is developed for brake system connections that maintain a basically fixed relationship between couplings during vehicle operation. Tubing is made from nylon and is available in more than ten colors for quick identification of lines.

Parker Air Brake tubing is produced in a Type A (Single-wall extruded Nylon) and a Type B (Nylon core, Fiber reinforcement, Nylon jacket) tubing. Both products meet specifications SAE J844 and DOT FMVSS 49CFR 571.106. Also, these products are 100% pressure tested and operate up to 200°F (93°C).

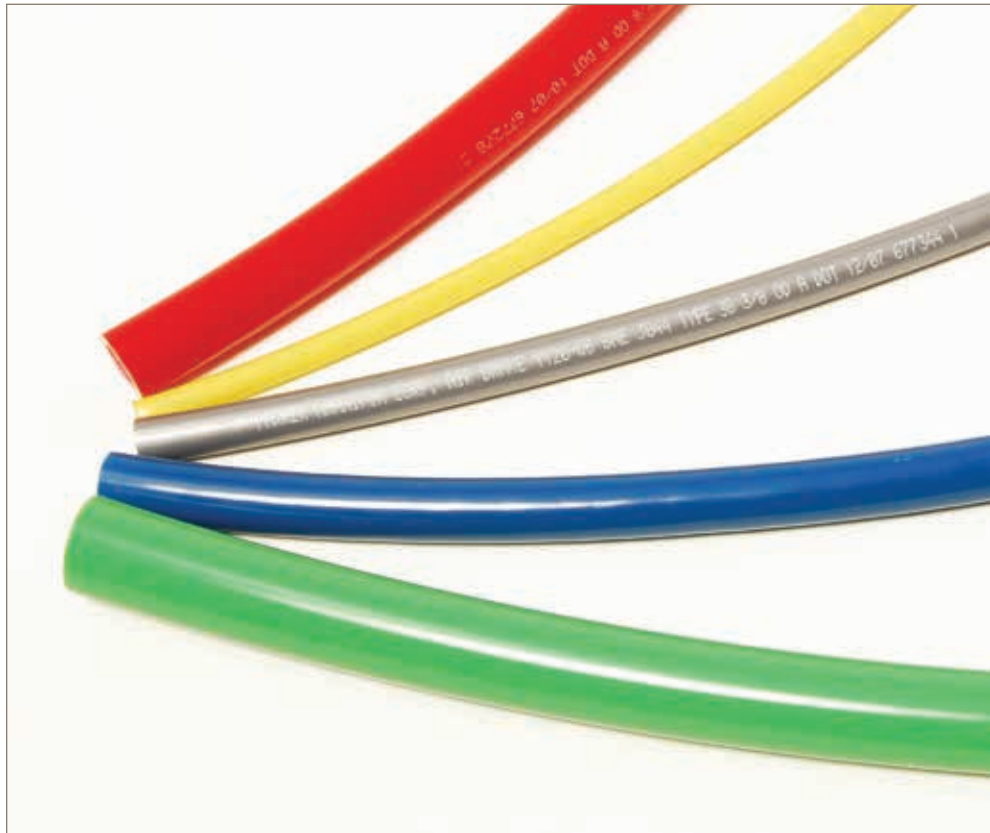

Contact Information:

Parker Hannifin Corporation
Parflex Division
1300 North Freedom St.
Ravenna, OH 44266
phone 330 296 2871
fax 330 286 8433
www.parker.com/parflex


Product Features:

- 100% Pressure Tested
- Excellent UV Stability
- Abrasion Resistant
- Kink Resistant
- Increased dimensional stability
- Reduced manufacturing and labor costs
- Less downtime due to kinking failures
- Tubing maintains extended dimensional integrity



ENGINEERING YOUR SUCCESS.

1120 Nylon Air Brake Tubing

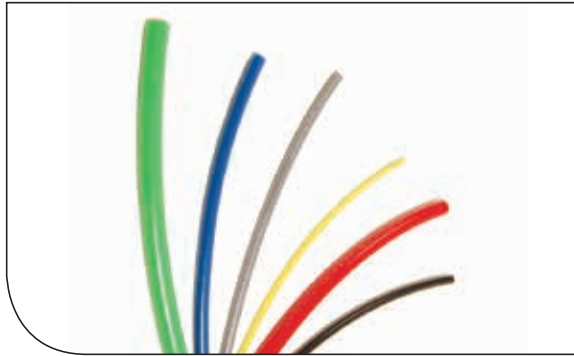

Features

- 100% Pressure Tested
- Excellent UV Stability
- Abrasion Resistant
- Kink Resistant

Certifications

- Meets SAE Specification J844
- Meets DOT FMVSS 49CFR 571.106
*2A, 3A, and 5A are not DOT sizes

Applications



- Air brake lines

Part Number	Tube O.D.		Outside Diameter		Inside Diameter		Nominal Wall Thickness		Burst Pressure at 73°F / 23°C		Minimum Bend Radius		Weight		Standard Reel		Standard Pallet		
	inch	mm	inch	mm	inch	mm	inch	mm	psi	bar	inch	mm	lbs./100 ft.	kg./31 mtr.	feet	meter	feet	meter	
PFT-2A-XXX-1000*	1/8	.125	3.2	.079	2.0	.023	0.6	1000	69.0	.370	9.4	.340	.154	1000	305	24,000	7315		
PFT-2.5-XXX-1000	5/32	.156	4.0	.092	2.3	.032	0.8	1200	82.7	.500	12.7	.570	.259	1000	305	24,000	7315		
PFT-3A-XXX-1000*	3/16	.188	4.8	.118	3.0	.035	0.9	1200	82.7	.750	19.1	.770	.349	1000	305	24,000	7315		
1120-4A-XXX-1000	1/4	.250	6.4	.170	4.3	.040	1.0	1200	82.7	1.00	25.4	1.21	.549	1000	305	24,000	7315		
PFT-5A-BLK-500*	5/16	.313	7.9	.232	5.9	.040	1.0	1000	69.0	1.25	31.8	1.57	.712	500	152	12,000	3658		
1120-6B-XXX-500	3/8	.375	9.5	.251	6.4	.062	1.6	1400	96.5	1.50	38.1	2.70	1.22	500	152	12,000	3658		
1120-8B-XXX-500	1/2	.500	12.7	.376	9.6	.062	1.6	950	65.5	2.00	50.8	3.90	1.77	500	152	6,000	3658		
1120-10B-XXX-250	5/8	.625	15.9	.441	11.2	.092	2.3	900	62.1	2.50	63.5	7.00	3.18	250	76	3,000	914		
1120-12B-XXX-250	3/4	.750	19.1	.566	14.4	.092	2.3	800	55.2	3.00	76.2	8.60	3.90	250	76	3,000	914		

Note: *2A, 3A, and 5A are not DOT sizes XXX represents color code

Construction

Material:

Type A - Single-wall extruded Nylon (polyamide)

Type B - Nylon (polyamide) core, fiber reinforcement, Nylon (polyamide) cover/sheath

Operating Parameters

Temperature Range:

-40°F (-40°C) to +200°F (93°C)

Working Pressure: 150 psi (10.3 bar)

Fittings

Parker Fittings available from:

Fluid System Connectors Division

Otsego, MI

(269) 692-6555

(269) 694-4614 FAX

FSC Product Families:

- NTA ▪ Air Brake
- Prestomatic ▪ PMT
- PTC

Colors

Color Code		
●	BLK	Black
●	BLU	Blue
●	BRN	Brown
●	GRN	Green
●	ORG	Orange
●	PUR	Purple
●	RED	Red
●	SIL	Silver
●	TAN	Tan
●	YEL	Yellow
○	WHT	White



Cannon Water Technology Inc.

233 Technology Way Suite 9, Rocklin, CA 95765

Voice: 1 916-315-2691, FAX: 1 916-304-0210

csd@cannonwater.com, <https://cannonwater.com/>