UltraFlo® 4000 SERIES Ultrasonic Flow Meter



- **⊘** Measures Dosing | Pulsating Flow
- **⊘** No Moving Parts
- Ultra Low Flow Applications




Product Description

The **UltraFlo® 4000** Flow Meter utilizes ultrasonic technology to measure both conductive and non conductive liquids, and is an excellent choice for very corrosive liquids such as strong acids and alkalies.

The **UltraFlo® 4000** has no moving parts and can measure pulsating, dosing and metering flow applications. All parts that contact the liquid are made of corrosion resistant Polysulfone.

The **UltraFlo® 4000** is characterized by its high measurement accuracy, repeatability and guaranteed long-life performance.

Working Principle

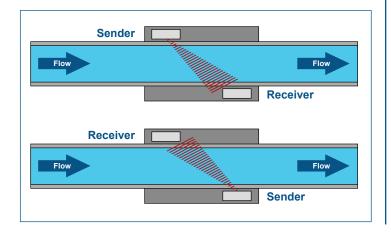



Features


- **⊘** All Plastic Polysulfone Wetted Materials
- **⊘** M12 Quick Disconnect
- **⊘** Superior Corrosion Resistance
- **⊘** Negligible Pressure Drop
- **⊘** Empty Pipe Alarm
- **Output** Air Bubble Detection

Blind Display Option

- Output to a PLC or a Remote Display
- ✓ 4-20mA + Pulse Relay Output | RS-485
- **⊘** NEMA 4X



Sound Wave Technology

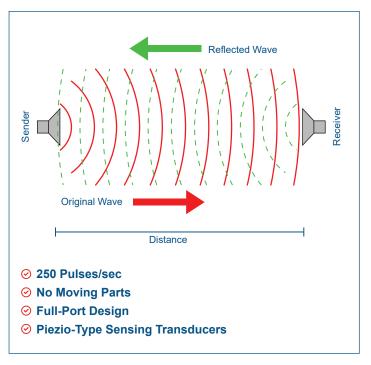




Technical Specifications

General				
Material	Polysulfone			
Protection Class	IP67 NEMA 4X			
Medium Temperature	14 -176°F -10°- 80°C			
Measuring Range GPM LPM	0.08 – 5.5 0.3 - 21	0.2 – 9.5 0.9 - 36	0.9 – 15.8 3.5 - 60	1.3 – 63.4 5 - 240
Max. Pressure Non-Shock	145 psi 10 bar	145 psi 10 bar	145 psi 10 bar	145 psi 10 bar
Process Connection				
Outside Thread	1/2"	3/4"	1"	11/4"
Weight lbs	1.0	1.0	1.3	1.3
Electrical				
Power Supply	24VDC 3.6W			
Connection	M12			
Output	4-20mA + Pulse Relay RS-485			
Display				
LCD Display	Simultaneous display of volume flow, quantity, bar graph, lighted			
Standards and Approvals				
CE FCC RoHS Compliant				

Measuring Points

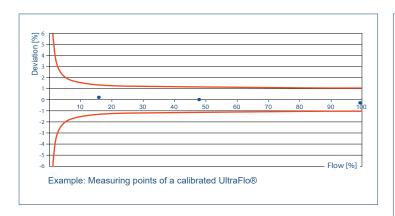

Model Selection

Size	Part Number	Material
1/2"	UFM-4000-50	PSU
3/4"	UFM-4000-75	PSU
1"	UFM-4000-100	PSU
11/4"	UFM-4000-125	PSU

Application Example

